

SHARP

ND-RJ260 | 260 W
ND-RJ265 | 265 W
ND-RJ270 | 270 W

The reliable solution (RJ)
260/265/270 W
Poly



For your independence

Take advantage of solar panels + battery solutions for maximum independence



55 years of solar expertise



Guaranteed positive power tolerance (0/+5 %)



Top PV brand award



Proven Quality

TÜV, IEC/EN61215, IEC/EN61730
Safety class II/CE
Application class A
DIN EN 13501-1 (class E)
MCS accredited product



Polycrystalline silicon photovoltaic modules



Made in Germany



Product guarantee



Linear power output guarantee



Robust product design
Ammonia test passed (DLG focus test)
Salt mist test passed (IEC61701)

Electrical data (at STC)					
		ND-RJ270	ND-RJ265	ND-RJ260	
Maximum power	P_{max}	270	265	260	W_p
Open-circuit voltage	U_{oc}	37.99	37.72	37.45	V
Short-circuit current	I_{sc}	9.15	9.06	8.98	A
Voltage at point of maximum power	U_{mpp}	31.29	31.04	30.79	V
Current at point of maximum power	I_{mpp}	8.70	8.61	8.52	A
Module efficiency	η_m	16.5	16.2	15.9	%

STC = Standard Test Conditions: irradiance 1,000 W/m², AM 1.5, cell temperature 25 °C.

Rated electrical characteristics are within ±10 % of the indicated values of I_{sc} , U_{oc} and 0 to +5 % of P_{max} (power measurement tolerance ±3 %).

Reduction of efficiency from an irradiance of 1,000 W/m² to 200 W/m² ($T_{module} = 25 °C$) is less than 4 %.

Electrical data (at NOCT)					
		ND-RJ270	ND-RJ265	ND-RJ260	
Maximum power	P_{max}	201.4	197.6	193.9	W_p
Open-circuit voltage	U_{oc}	34.96	34.72	34.47	V
Short-circuit current	I_{sc}	7.39	7.32	7.25	A
Voltage at point of maximum power	U_{mpp}	28.61	28.39	28.16	V
Current at point of maximum power	I_{mpp}	7.04	6.96	6.89	A


NOCT: Module operating temperature at 800 W/m² irradiance, air temperature of 20 °C, wind speed of 1 m/s. NOCT = 46 °C.

Mechanical data	
Length	1,654 mm
Width	989 mm
Depth	40 mm
Weight	18.2 kg

Temperature coefficient	
P_{max}	-0.42 %/°C
U_{oc}	-0.32 %/°C
I_{sc}	0.044 %/°C

Limit values	
Maximum system voltage	1,000 V DC
Over-current protection	15 A
Temperature range	-40 to +85° C
Max. mechanical load (snow/wind)	2,400 Pa
Tested snow load (IEC61215 test pass*)	5,400 Pa

Dimensions (mm)

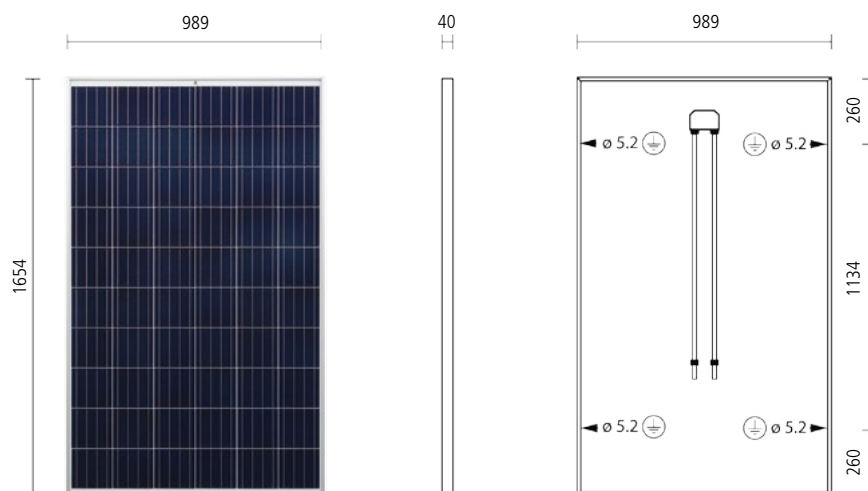

*Please refer to Sharp's installation manual for details.

General data	
Cells	polycrystalline, 156 mm × 156 mm, 60 cells in series
Front glass	low iron tempered glass, 3.2 mm
Frame	anodized aluminium alloy, silver
Connection box	PPE+PS resin, IP67 Rating, 90 × 72 × 16 mm, 3 bypass diodes
Cable	PV1-f cable 4.0 mm, length 1,000 mm
Connector	MC4

Packaging data	
Modules per pallet	22 pcs
Pallet size (L × W × H)	1.70 m × 1.03 m × 1.25 m
Pallet weight	420 kg



Empower yourself

www.sharp.eu

SHARP

Contact Sharp

SHARP ELECTRONICS GMBH
ENERGY SOLUTIONS
NAGELSWEG 33 - 35
20097 HAMBURG
GERMANY
T: +49 (0) 40/2376-2436
F: +49 (0) 40/2376-2193

Contact Installer

Local responsibility: **Benelux** SolarInfo.seb@sharp.eu, **France** SolarInfo.fr@sharp.eu, **Germany** SolarInfo.de@sharp.eu, **Poland** energy-info.pl@sharp.eu
Spain & Portugal SolarInfo.es@sharp.eu, **United Kingdom** SolarInfo.uk@sharp.eu, **Other countries** SolarInfo.Europe@sharp.eu

Note: Technical data is subject to change without prior notice. Before using Sharp products, please request the latest data sheets from Sharp. Sharp accepts no responsibility for damage to devices which have been equipped with Sharp products on the basis of unverified information. The specifications may deviate slightly and are not guaranteed. Installation and operating instructions are to be found in the corresponding handbooks, or can be downloaded from www.sharp.eu/solar. This module should not be directly connected to a load.