


ND-RJ270 | ND-RJ275

ND-RJ Series

270 W | 275 W

The Reliable Solution

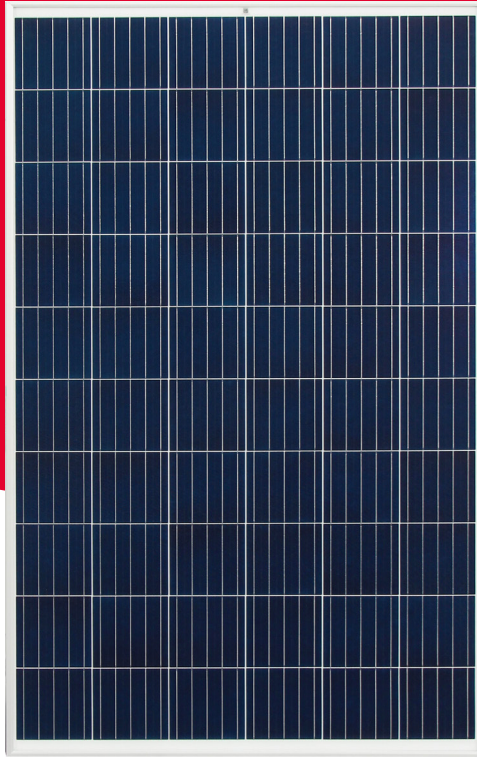

Main product features



Guaranteed positive power tolerance (0/+5%)



Polycrystalline silicon photovoltaic modules



Portrait or landscape mounting



Proven quality
TÜV, IEC/EN61215, IEC/EN61730



Safety class II / CE
Application class A



DIN EN 13501-1 (class E)
MCS accredited product



Made in Germany



Robust product design
Ammonia test passed (IEC62716)
Salt mist test passed (IEC61701)



5 busbar technology
Improved reliability
Higher efficiency
Reduced series resistance

Buy from the solar pioneer



59 years of solar expertise



Linear power output guarantee



Product guarantee



50 million PV modules installed



Local support team in Europe



Top PV brand award



Energy Solutions

SHARP
Be Original.

Electrical data (STC)

		ND-RJ275	ND-RJ270	
Maximum power	P_{max}	275	270	W_p
Open-circuit voltage	V_{oc}	38.21	37.94	V
Short-circuit current	I_{sc}	9.41	9.32	A
Voltage at point of maximum power	V_{mpp}	31.2	30.98	V
Current at point of maximum power	I_{mpp}	8.9	8.8	A
Module efficiency	η_m	16.8	16.5	%

STC = Standard Test Conditions: irradiance 1,000 W/m², AM 1.5, cell temperature 25 °C.

Rated electrical characteristics are within ±10% of the indicated values of I_{sc} , V_{oc} and 0 to +5% of P_{max} (power measurement tolerance ±3%).

Reduction of efficiency from an irradiance of 1,000 W/m² to 200 W/m² ($T_{module} = 25 °C$) is less than 5%.

Electrical data (NOCT)

		ND-RJ275	ND-RJ270	
Maximum power	P_{max}	205.3	201.5	W_p
Open-circuit voltage	V_{oc}	35.17	34.92	V
Short-circuit current	I_{sc}	7.6	7.53	A
Voltage at point of maximum power	V_{mpp}	28.54	28.33	V
Current at point of maximum power	I_{mpp}	7.19	7.11	A

Electrical values measured under nominal operating conditions of cells: 800 W/m² irradiance, air temperature of 20 °C, wind speed of 1 m/s. NOCT: 46 °C (nominal operating cell temperature).

Mechanical data

Length	1,654 mm
Width	989 mm
Depth	40 mm
Weight	18.2 kg

Temperature coefficient

P_{max}	-0.42 %/°C
U_{oc}	-0.32 %/°C
I_{sc}	0.044 %/°C


Limit values

Maximum system voltage	1,000 VDC
Over-current protection	15 A
Temperature range	-40 to 85 °C
Max. mechanical load (snow / wind)	2,400 Pa
Tested snow load (IEC61215 test pass*)	5,400 Pa

Packaging data

Modules per pallet	22 pcs
Pallet size (L × W × H)	1.71 m × 1.05 m × 1.25 m
Pallet weight	approx. 435 kg

Dimensions (mm)

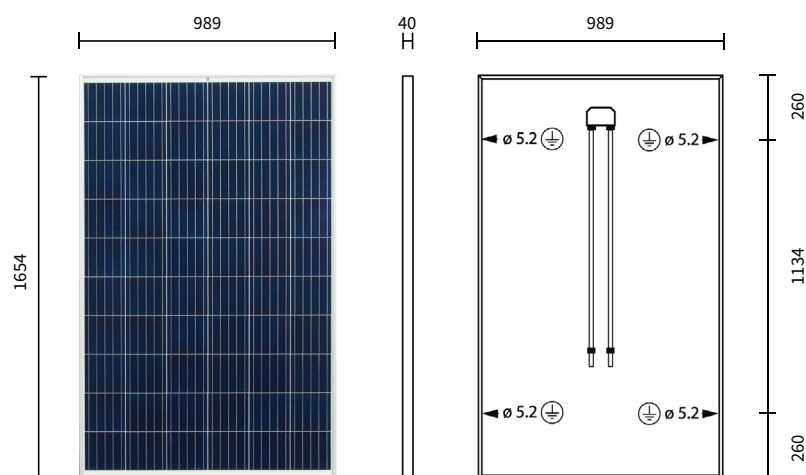

*Please refer to Sharp's installation manual for details.

General data

Cells	polycrystalline, 157 mm × 157 mm, 60 cells in series
Front glass	anti-reflective high transmissive low iron tempered glass, 3.2 mm
Frame	anodized aluminium alloy, silver
Connection box	IP67 rating, 3 bypass diodes
Cable	diameter 4.0 mm ² , length 1,000 mm
Connector	MC4

Note: Technical data is subject to change without prior notice. Before using Sharp products, please request the latest data sheets from Sharp. Sharp accepts no responsibility for damage to devices which have been equipped with Sharp products on the basis of unverified information. The specifications may deviate slightly and are not guaranteed. Installation and operating instructions are to be found in the corresponding handbooks, or can be downloaded from www.sharp.eu/solar. This module should not be directly connected to a load.

Contact Sharp

SHARP Electronics GmbH
Energy Solutions
Nagelsweg 33 - 35
20097 Hamburg, Germany
T: +49 (0) 40 / 2376-2436
E: SolarInfo.Europe@sharp.eu

SHARP
Be Original.